SECTION E CERTIFICATION

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

SEE REVERSE SIDE FOR CONTINUATION

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
HUMBUR SECLETY OF THE PIKES PEAK REGION					PÓLICY NUMBER
STREET ADDRESS (Including Apr., Unit, Suite and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.)				
COLORADO SPEINGO CO					ZIP CODE ECFOS
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	:
Provide the following from the proper FIRM (See Instructions):					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (In AO Zones, use depth)
080060	08041C07E1	F	MARCH 17,1997	AE	59555*
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) B. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:					
SECTION C BUILDING ELEVATION INFORMATION					
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The finance one) the highest grade level) elevated in accord. Indicate the elevation daturder Comments on Page	is at an elevation of L BFE). The floor used the highest grade adj loor used as the refere adjacent to the building rdance with the commum system used in de e 2). (NOTE: If the add, Item 7], then conver	as the referent accent to the being level from the series of the series	feet NGVD (or other FIRI nce level from the selected uilding. In the selected diagram is depth number is available ain management ordinance	I datum—see Sed diagram is LL. I feet about, is the building's Prations: NOVE	ction B, Item 7). I. feet above or ove or below (check lowest floor (reference) To Unknown O '29 Other (describe) ant than that used on
. Elevation reference mark used appears on FIRM: 🔲 Yes 💢 No. (See Instructions on Page 4)					
5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)					
i. The elevation of the lowest grade immediately adjacent to the building is: 159451. I feet NGVD (or other FIRM datum-see Section B, Item 7).					
SECTION D COMMUNITY INFORMATION					
. If the community official re is not the "lowest floor" as floor" as defined by the or	defined in the comme	unity's floodpla └ . └ feet N		, the elevation of	the building's "lowest

REPLACES ALL PREVIOUS EDITIONS

FEMA Form 81-31, MAR 97

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(a) list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, patched.

I certify that the information in Sections B and C on this certificate represents my best efforts to a term of the child of the children of the control of t

TICHARD AL WRAY

COLDIZADO PE #

19310

PRINCIPA

CIOWA ENGINEERI

ON AL ENGINEE

8091C

ADDRESS UND

Low

12/99


719-630-7342

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

* SOE ATTACHED LETTER

FIRST FLOOR ELEVATION 5956.5

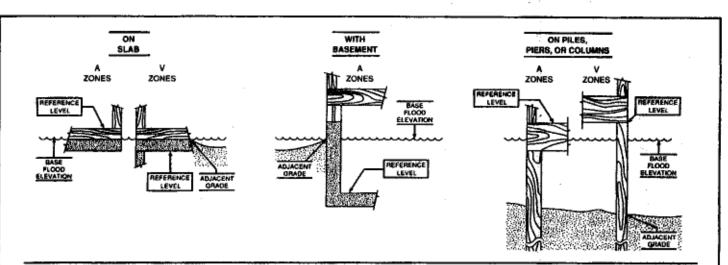

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.